

## **GREENFLEX**

### **CHARACTERISTIC AND USE:**

- For heavy duty applications in industry and agriculture. Suction and discharge of water and sewage.
- Conveyance of solids in granular forms.

**COLOR:** Olive Green.

**WORK PRESSURE:** 90 PSI AT 68° F

**EMPTINESS PRESSURE:** 1 ATM = 760 mm. Hg

**MATERIAL:** PVC.

**WORK TEMP:** From 14° F to 140° F.

**SIZE:** ¾", 1", 1¼", 1 ½", 2", 2 ½", 3", 3½", 4", 5", 6", 8".

**LENGTH:** 100, 60 and 33 Ft..

**PACKAGING:** Coil with covering of plastic film



**PRODUCCION DE MANGUERAS PLASTICAS NAM S.A. DE C.V.**


Enedino R. Arévalo Lote. 5 Mza. 2 S/N, Parque Industrial Exportec II, Esq. Blvd. Aeropuerto,  
Toluca, Edo. De México. C.P. 50200 TEL (722)2735020/21, (55)53975807

[www.pmpnam.com](http://www.pmpnam.com)

**GREENFLEX**

<b>SPECIFICATION TABLE</b>						
<b>PART NO.</b>	<b>I.D. (In.)</b>	<b>O.D. (In.)</b>	<b>THICKNESS (In.)</b>	<b>Ft/Coil</b>	<b>BENDING RADIO (In.)</b>	<b>WEIGHT/COIL (Lbs)</b>
1072VE0750CS	3/4"	0.99	0.12	100.00	5	18.9
1072VE1000CS	1"	1.24	0.13	100.00	6	23.5
1072VE1250CS	1 1/4"	1.50	0.13	100.00	8	29.8
1072VE1500CS	1 1/2"	1.76	0.14	100.00	10	37.4
1072VE2000CS	2"	2.31	0.16	100.00	13	59.1
1072VE2500CS	2 1/2"	2.85	0.18	100.00	16	79.4
1072VE3000CS	3"	3.41	0.20	100.00	19	122.4
1072VE3500CS	3 1/2"	3.93	0.22	100.00	23	131.4
1072VE4000CS	4"	4.49	0.24	100.00	26	176.4
1072VE5000BS (SO)	5"	5.47	0.24	60.00	33	167.5
1072VE6000BS	6"	6.76	0.28	60.00	39	187.4
1072VE8000AS (SO)	8"	8.52	0.31	60.00	41	159.8

SO = SPECIAL ORDER

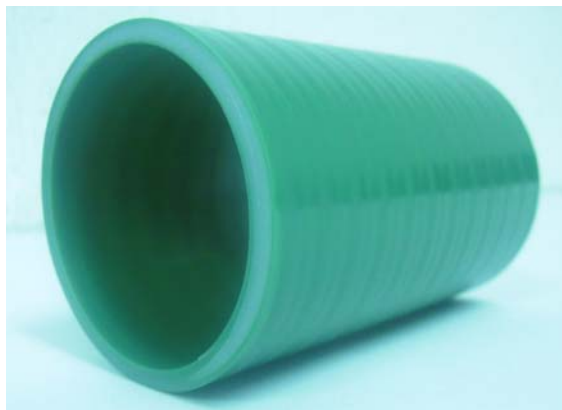

**PRODUCCION DE MANGUERAS PLASTICAS NAM S.A. DE C.V.**

Enedino R. Arévalo Lote. 5 Mza. 2 S/N, Parque Industrial Exportec II, Esq. Blvd. Aeropuerto,  
Toluca, Edo. De México. C.P. 50200 TEL (722)2735020/21, (55)53975807

[www.pmpnam.com](http://www.pmpnam.com)